




Controlled Dehumidification

5931 Ford Court Brighton, MI 48116 • 810.229.7900


Fax: 810.229.7908 • sales@ctrdh.com • ctrdh.com

MS-600-480MIL-ARID-Dry Desiccant Dehumidifier

<u>Model</u>	<u>CFM</u>	<u>Fuel Type</u>	<u>"A" Dim.</u>	<u>"B" Dim.</u>	<u>"C" Dim.</u>	<u>Weight</u>
MS-600-480MIL	600	Electric	28 5/8"	21 5/8"	42 1/4"	206 lbs

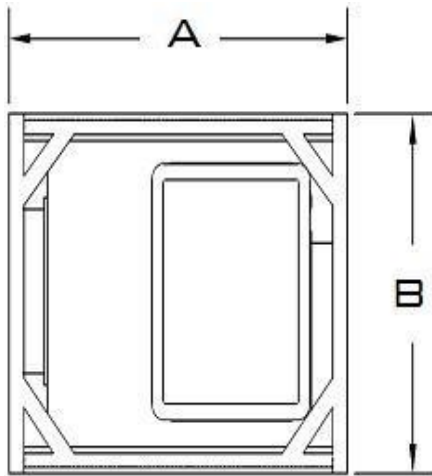

TOP VIEW

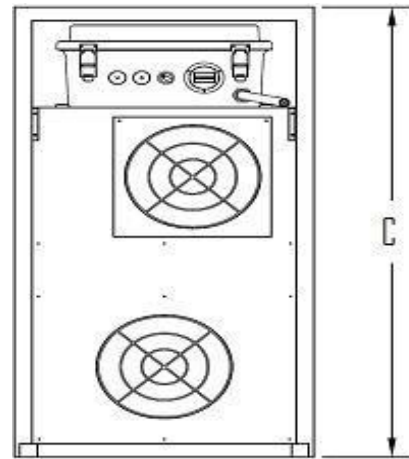

SIDE VIEW

	Static Pressure External	Moisture Removal Lbs/Hr 80°/60% RH	Moisture Removal Gallons/Day 80°/60% RH	Moisture Removal Lbs/Hr 55°/80% RH	Moisture Removal Gallons/Day 55°/80% RH	Electric Reactivation FLA Load 480/3/60	Electric Reactivation MCA Load 460/3/60
Air Volume	600	.75	8	23	6	17	8



- Rated for indoor use
- Splash proof and drip proof construction
- Remote Humidistat Connection
- 10" Round Connections
- 30% Pleated Efficiency Filters
- 304 Stainless Construction
- Power Cord Kits Available