





Controlled Dehumidification

5931 Ford Court Brighton, MI 48116 • 810.229.7900

Fax: 810.229.7908 • sales@ctrdh.com • ctrdh.com

MS-12000/10000-ARID-Dry Units

<u>Model</u>	<u>CFM</u>	<u>Fuel Type</u>	<u>"A" Dim.</u>	<u>"B" Dim.</u>	<u>"C" Dim.</u>	<u>Weight</u>
CDH-R-154	12,000/10,000*	Gas or Electric	193"	96"	72"	7,600 lbs
CDH-R-154	12,000/10,000*	Dual	193"	96"	72"	7,600 lbs

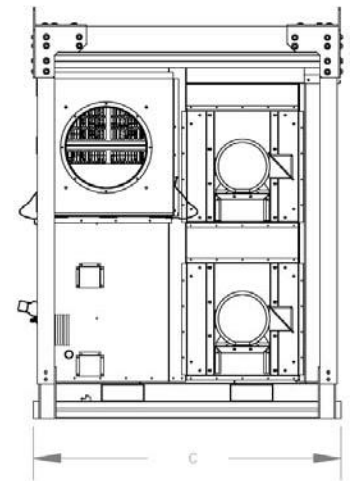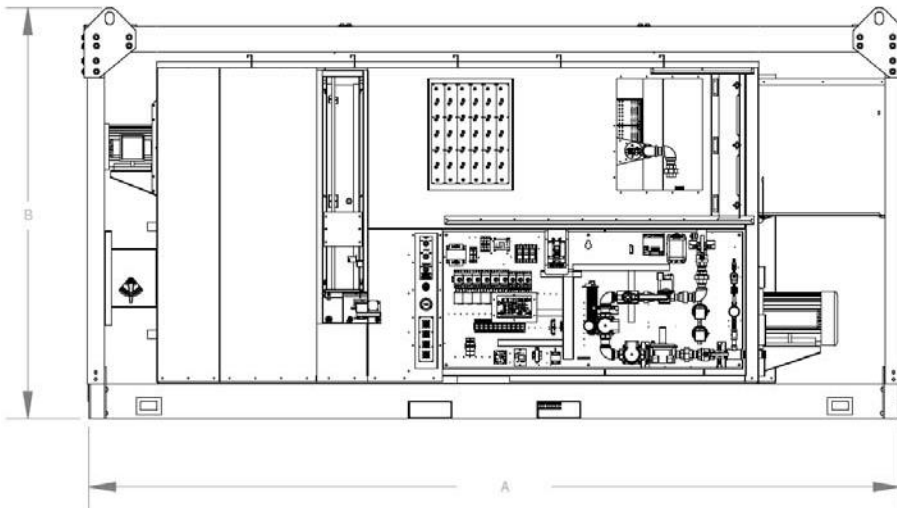

<u>Max Air Volume</u>	<u>Moisture Removal Lbs/Hr 80°/60% RH</u>	<u>Moisture Removal Gallons/Day 80°/60% RH</u>	<u>Moisture Removal Lbs/Hr 55°/80% RH</u>	<u>Moisture Removal Gallons/Day 55°/80% RH</u>	<u>Moisture Removal Lbs/Hr 40°/80% RH</u>	<u>Moisture Removal Gallons/Day 40°/80% RH</u>
12,000	295	851	253	729	169	486

<u>Pipe Size</u>	<u>LP Inlet Pressure</u>	<u>Natural Gas Inlet Pressure</u>	<u>Electric Reactivation Load 230/1/60</u>	<u>Electric Reactivation FLA Load 460/3/60</u>	<u>Gas Reactivation FLA Load 460/3/60</u>	<u>CFH Gas Max Usage NG</u>	<u>Gallon/HR Max Usage LP</u>
1.5"	7-14" w.c.	7-14" w.c.	N/A	292	42	718	7.6



Weights and Dimensions subject to change without notice *2" or 5" External Static Pressure ** Deduct 1500 lbs for removal of Protective Cage Revised 9-3-2015